


BRICK OR CEMENT
CONE AS REQUIRED

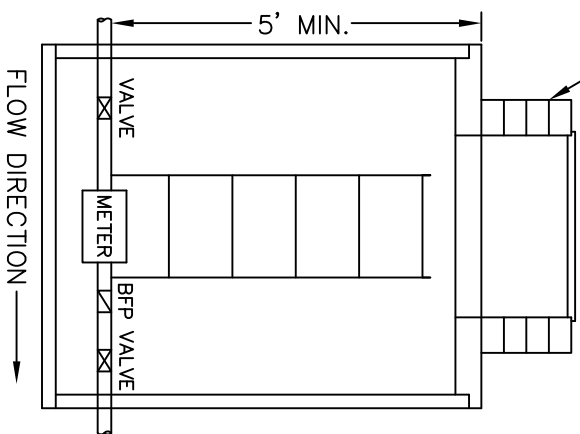

METER

1. TO BE PURCHASED FROM THE DISTRICT AND INSTALLED BY THE DISTRICT
2. MINIMUM 5' DIAMETER CONCRETE MANHOLE WITH CEMENT BASE
3. OWNER IS TO PROVIDE A VALVE BEFORE THE METER AND APPROVED BACKFLOW PREVENTER (BFP) AFTER THE METER INSIDE OF THE PIT

COVER PLATE

1. COVER MUST WEIGH LESS THAN 170LBS
2. MINIMUM SIZE OF COVER WILL BE 32"
3. COVER TO CONFORM TO PAMREX 32MH OR EQUAL
4. DUCTILE IRON COVER MARKED CLEARLY WITH "WATER" REQUIRED

NOTES

1. THIS PIT IS TO BE PLACED ON PRIVATE PROPERTY NEAR THE STREET
2. THIS TYPICAL PIT SHOULD BE DESIGNED FOR TRAFFIC LOAD
3. INTERIOR FIXED LADDER REQUIRE, USE CAST IRON STEPS R1980 T NEENAH OR EQUAL. BOLTING TO BE INSTALLED IN VERTICAL AT 16" CENTERS
4. BACKFLOW PREVENTER (BFP) TO MATCH SERVICE RISK FACTOR

TYPICAL 2" AND SMALLER METER PIT DETAIL

NTS

REVISED 1/28/2013

